


Assembly Instructions

37-pole Connector

not suitable for SEAL

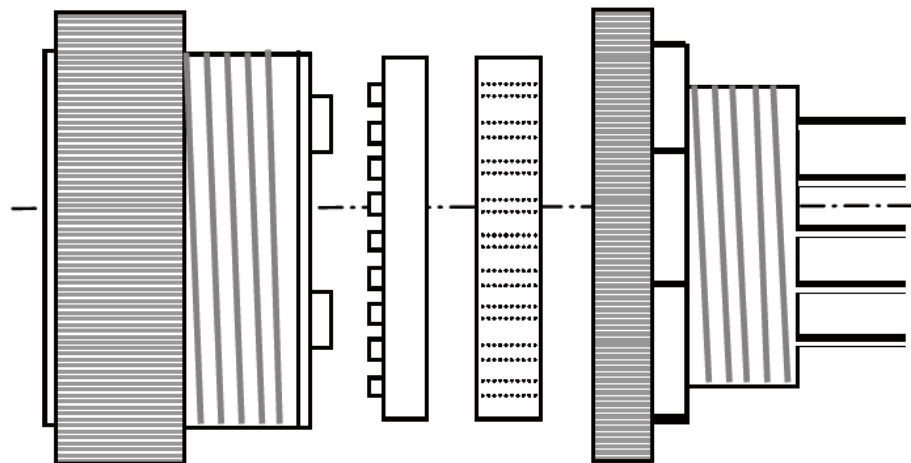

Single Parts

The plug or the socket comprises the according housing box, a seal (silicon 30 Shore), a pressure plate and one of three possible adapters for corrugated tubes. The connector can be allocated either with pin contacts or jack contacts. There are 37 contacts \varnothing 1.6 mm. Correct assembly ensures IP 67. All displayed parts have to be assembled correctly in the stated order.

Assembly

Wire Insertion

The wires are carried through the cavities in the seal puncturing the nubs. The wires must not be bared and crimp contacts must not be applied to avoid damaging of the seal. This is important to provide leak tightness in assembled status. The nubs of the seal have to point to the plug or the socket. A clear coding avoids wrong assembly. The wires are stripped and crimp contacts are applied. Usable wire cross-sections are listed in the part overview on page 2 of this document.

Final Assembly


After allocation of the connector housing with pin contacts or jack contacts the seal is pressed on the back of the housing as plane as possible. The pressure plate is assembled. It can be positioned in one dedicated direction only. Finally the respective adapter for corrugated tubes is screwed on. Ensure the usage of a proper tool with width across flats 41 mm and the application of a tightening torque in the range of 2 to 4 Nm. A center ring for pin contacts can be used optionally before the connection of plug and socket.

Part Overview

Designation	Part no.
37-pole plug for pin contacts or jack contacts	7811373
37-pole socket for pin contacts or jack contacts	7812370
Seal for plug or socket	7810377
Pressure plate for plug or socket	7810385
Center ring for pin contacts (optional)	7810402
Adapter 21 NW 17	7807259
Adapter 26 NW 22	7807260
Adapter 34 NW 29	7807341
Jack contact Ø 1,6 mm 0,5 – 1,0 mm ²	7814009
Jack contact Ø 1,6 mm > 1,0 – 1,5 mm ²	7814011
Pin contact Ø 1,6 mm 0,5 – 1,0 mm ²	7815016
Pin contact Ø 1,6 mm > 1,0 – 1,5 mm ²	7815018

Schematic View

Analogue assembly of socket

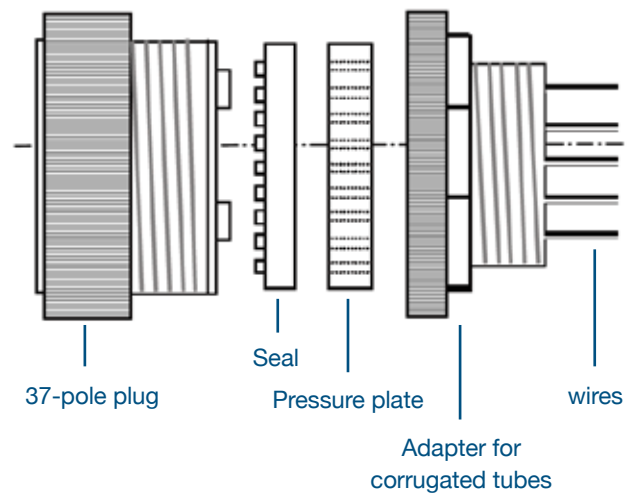

The Schlemmer Group is a global technology expert, which has focused on the development and production of industrial solutions, including the area of sensitive electrical installations. Drawing on 60 years of experience in cable protection, the Group has evolved into a lea-

ding and comprehensive value added supplier. In addition to the traditional business segment Automotive, the Schlemmer Group operates in numerous other industries with its business segments Industry and Appliances.

Any questions left?

Visit our website at
www.schlemmer.com
 or write us an e-mail at
info@schlemmer.com

